


PROIETTORE DA LAVORO
REWORK



PROIETTORE CON MANICO FLOODLIGHT WITH HANDLE



	A mm	B mm	C mm	g
30 W	250	250	180	1300
50 W	292	280	180	1556
70 W	340	370	190	2108
100 W	400	430	250	2960
150 W	400	430	250	3080
200 W	445	475	250	4168


30 W	2.530 lm	4000 K		RW-308540	1/4	
50 W	4.425 lm	4000 K		RW-508540	1/4	
70 W	5.990 lm	4000 K		RW-708540	1/4	
100 W	8.350 lm	4000 K		RW-1008540	1/4	
150 W	12.800 lm	4000 K		RW-1508540	1/4	
200 W	17.000 lm	4000 K		RW-2008540	1/4	

220-240 V IP65 IK05 115°

1,5 m - H07RN-F DIE-CAST ALUMINUM

Proiettore portatile alimentato da rete elettrica. Base in metallo e corpo in alluminio pressofuso con vernice epossidica.

Mains powered portable floodlight. Metal base and die-cast aluminum body with epoxy paint.

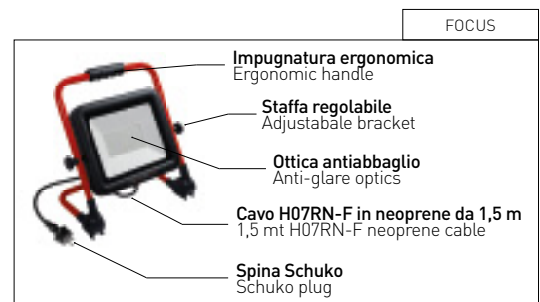



PROIETTORI PORTATILI • RW-308540 REWORK



30W • 2530 Lm • 4000K



Durata



≥12.500
Accensioni



Caratteristiche generali

General characteristics / Caractéristiques générales / Obecné vlastnosti / Allgemeine Merkmale / Características generales / Geniká charaktiristiká

Codice Articolo RW-308540
Item number / Code de l'article / Kód položky / Artikelcode / Código del artículo / Kodikós stoicheíou

Codice EAN 9090171008470
EAN code / Code EAN / Kód EAN / EAN-Code / Código EAN / Kodikós EAN

Tecnologia LED
Technology / Technologie / Technologie / Technologie / Tecnología / Tecnología

Tipologia APPARECCHIO
Type / Type / Typ / Typ / Tipo / Týpos

Famiglia PROIETTORI PORTATILI
Family / Famille / Rodina / Familie / Família / Οικογένεια

Linea REWORK
Line / Ligne / Řádek / Linie / Línea / Grammí

Dimensioni

Dimensions and weight / Dimensions et poids / Rozměry a hmotnost / Abmessungen und Gewicht / Dimensiones y peso / Διαστάσεις και βάρος

Larghezza 250 mm
Width / Largeur / Šířka / Breite / Ancho / Πλάτος

Spessore 250 mm
Thickness / Épaisseur / Tloušťka / Dicke / Espesor / Πάχος

Peso netto 1300 gr
Net weight / Poids net / Čistá hmotnost / Nettogewicht / Peso neto / Καθαρό βάρος

Imballo

Packing / Emballage / Obal / Verpackung / Embalaje / Syskevασία

Inner Carton 1 pz
Inner Carton / Carton Intérieur / Vnitřní karton / Innerer Karton / Caja de cartón interior / Εσωτερικό κουτί

Master carton 4 pz
Master Carton / Maître Carton / Vnější karton / Vorlagenkarton / Master Carton / Κύριο κουτί

Peso lordo 1417 gr
Gross weight / Poids Brut / Hrubá hmotnost / Bruttogewicht / Peso bruto / Μεϊκτό βάρος

Confezione Color Box
Package / Emballage / Balík / Paket / Paquete / Πακέτο

Caratteristiche tecniche

Technical features / Caractéristiques techniques / Technické vlastnosti / Technische Merkmale / Características técnicas / Τεχνικά χαρακτηριστικά

Potenza effettiva 30W
Effective power / Puissance effective / Efektivní výkon / Wirkleistung / Poder efectivo / Αποτελεσματική ισχύς

Flusso Luminoso Output 2530 Lm
Output luminous flux / Flux lumineux de sortie / Výstupní světelný tok / Ausgangslichtstrom / Flujo luminoso de salida / Κιμενετί φέινυάραμ

Colore luce 4000K
Light color / Couleur claire / Barva světlá / Helle Farbe / Color claro / Χρόμα fotos

Apertura fascio 115°
Beam opening / Ouverture du faisceau / Úhel vyzařování / Balkenöffnung / Apertura de la viga / Ανοίγμα δοκών

Resa cromatica (CRI) 80
Color rendition (CRI) / Rendu des couleurs (Cri) / Ztvárnění barev (CRI) / Farbwiedergabe (CRI) / Rendimiento de color (CRI) / Παράδοσι χρωμάτων (CRI)

Dimmerabile N
Dimmable / Dimmable / Strmívatelné / Dimmbare / Regulable / Με ροοστάτι

Voltaggio 220-240 V/AC
Voltage / Tension / Napětí / Spannung / Voltaje / Τάση

Altre caratteristiche

Other characteristics / Autres fonctionnalités / Další funkce / Andere Funktionen / Otras características / Άλλα χαρακτηριστικά

Frequenza 50/60 Hz
Frequency / Fréquence / Kmitočet / Frequenz / Frecuencia / Συχνότητα

Corrente assorbita 130 mA
Current consumption / Consommation actuelle / Spotřeba proudu / Stromverbrauch / Consumo actual / Τρέχουσα katanάλoσι

Classe energetica F
Energetic class / Classe énergétique / Energetická třída / Energieklasse / Clase de energia / Ενεργειακή κλάση

Durata ore 25000 h
Duration / Durée / Trvání / Dauer / Duración / Διάρκεια

Cicli di accensione 12500
Ignition cycles / Cycles d'allumage / Spínací cykly / Zündzyklen / Ciclos de encendido / Κύκλοι ανάφλεξις

Temperatura d'esercizio -20 +50 °C
Operating temperature / Température de fonctionnement / Provozní teplota / Betriebstemperatur / Temperatura de funcionamiento / Θερμοκρασία λειτουργίας

Grado protezione IP65
Degree of protection / Degré de protection / Stupeň ochrany / Schutzgrad / Grado de protección / Βαθμός προστασίας

Grado resistenza Urti IK05
Impact resistance degree / Degré de résistance aux chocs / Stupeň odolnosti proti nárazu / Schlagfestigkeit Grad / Grado de resistencia al impacto / Βαθμός αντίστασις στin πρόσκρουσις



ENERG

CENTURY

RW-308540



30
kWh/1000h



2019/2015